



CHARACTERISTICS



Ambient temperature	Max +50 °C						
Fluid	50 µm filtered air, with or without lubrication						
Commutation system	poppet						
Max pressure	10 bar						
Connections	G1/8	G1/4	G3/8	G1/2	G3/4	G1	G1 1/2
Nominal bore (mm)	5,5	8	10	15	19	25	39
Nominal flow rate (NI/min)	580	1100	1500	5400	6500	13500	35000
Valve body	zamak (G1/8 ÷ G1), aluminium (G1 1/2)						
Seals	polyurethane conical poppets and Vulkollan diaphragm						
Spool	aluminium (G1/8 ÷ G3/8), steel + plastic (G1/2 ÷ G1 1/2)						
	G1/8 ÷ G3/8			G1/4 ÷ G1 1/2			
Electropilot	U1			U2			
Coil	DA			DB			
Power consumption	3,5 W (DC) - 5 VA (AC)			11 W (DC) - 10 VA (AC)			
Connector	AM-5110			AM-5111			
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC						
Manual override	impulse screw - 2 positions						

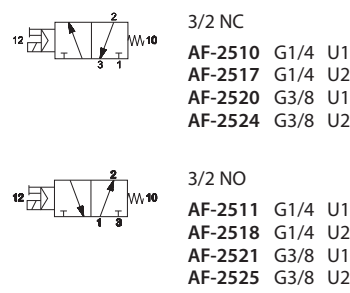



Solenoid valves G1/8 ÷ G3/8

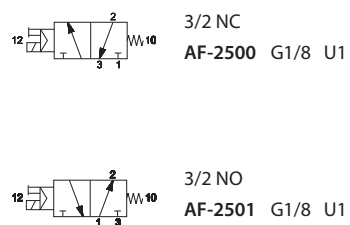

Solenoid valves G1/2 ÷ G1 1/2

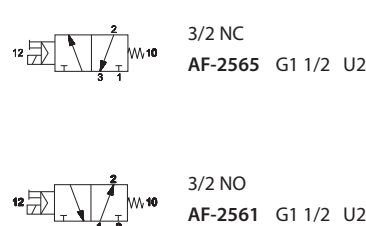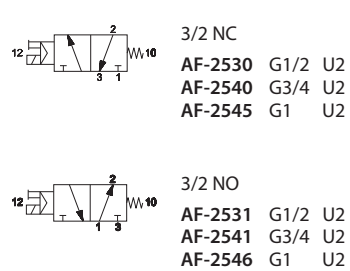

Pneumatic valves with external operation G1/8 ÷ G3/8

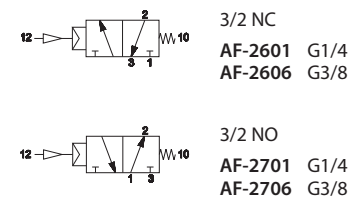

Solenoid valves are supplied without coil/connector/locking nut

AF Poppet Valves for compressed air G1/8 ÷ G1 1/2

Pneumatic valves with external operation G1/2 ÷ G1 1/2

		<p>3/2 NC-NO AF-2603 G1/2 AF-2610 G3/4 AF-2615 G1</p>			<p>3/2 NC-NO AF-2620 G1 1/2</p>
--	--	---	--	--	-------------------------------------

2/2 Solenoid valve for blowing G1

2/2 Pneumatic valve for blowing with ext. operation G1

		<p>2/2 NC AF-2550 G1 2/2 NC AF-2551 G1 2/2 NC AF-2552 G1</p>			<p>2/2 NC AF-2617 G1</p>
--	--	--	--	--	------------------------------

Solenoid valves are supplied without coil/connector/locking nut